

## SPRING CHECK VALVE


### INFORMATION

- One piece stem with O-Ring construction (easy seal replacement and positive shut-off)
- Viton O-Ring standard (other available upon request)
- Clamp connections standard (other connections available upon request)
- Full Polished ID and OD
- All metal contact surfaces of T316L Stainless Steel
- Sizes range from .5" through 4.0"
- Meets 3A sanitary standards



### PARTS BREAKDOWN

1. Lower body - (Body)
2. Stem - (2.0 thru 4.0 have guide fingers)
3. Spring - standard (3-5 psi)
- 3L Spring Light - (1-3 psi) Available upon request
4. O -Ring - standard Viton
5. Stem guide
6. Upper body - (Bonnet)
7. Body Clamp .5 and .75" = 13MHHM-H 1.5  
Body Clamp 1.0" and 1.5" = 13MHHM-H 2.5  
Body Clamp 2.0" = 13MHHM-H 3.0  
Body Clamp 2.5" = 13MHHM-H 4.0  
Body Clamp 3.0" = 13MHHM-H 5.0  
Body Clamp 4.0" = 13MHHM-H 6.0
8. Clamp Gasket .5 and .75 = EG40V 1.5  
Clamp Gasket 1.0 and 1.5 = EG40V 2.5  
Clamp Gasket 2.0 = EG40V 3.0  
Clamp Gasket 2.5 = EG40V 4.0  
Clamp Gasket 3.0 = EG40V 5.0  
Clamp Gasket 4.0 = EG40V 6.0

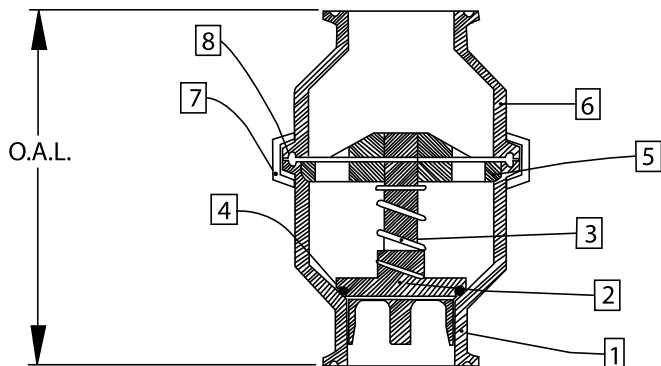

### PART NUMBER SEQUENCE WHEN ORDERING COMPLETE VALVE:

45 (spring check) C (clamp) 6 (T316L) 2.0 (size) V (seat material) Example: 45C - 6 2.0 - V

When requesting O-Ring changes add the following to the end of part number

Note: V=Viton E=EDPM S=Silicone B=Buna,

### PART NUMBER SEQUENCE WHEN ORDERING REPLACEMENT PARTS:

45-SCV (item number) - (valve size)

Example: 45-SCV1C-1.5 = Lower body clamp for 1.5 valve

Overall Length			
Valve Size	Standard Clamp	Weld and Other	Approx WT LBS
.5"	3 1/2	A.O.R	2.2
.75"	3 1/2	A.O.R.	2.2
1.0"	4 1/8	A.O.R	3.5
1.5"	4 9/16	A.O.R.	3.5
2.0"	5 1/16	A.O.R.	5.4
2.5"	5 3/8	A.O.R.	6
3.0"	6 1/8	A.O.R.	6.25
4.0"	8 1/8	A.O.R.	16